

TPA-A



PRODUCT DESCRIPTION

- Pre-assembled aluminium opened triangle

CHARACTERISTICS

- Inclined structure for installation of roof-mounted solar panels.
- Pre-assembled product.
- Includes 4 long profiles that make up the structure, an upper section, two lower sections, and a base, all manufactured from EN AW 6063-T6 extruded aluminium.
- Includes two base support sections, both manufactured from EN AW 6005-T6 extruded aluminium.
- Includes 2 **DIN-6921 M8x50** bolts, 2 **DIN-6923 M8** nuts, 2 **DIN-6921 M8x18** bolts, 2 **DIN 125** plain washer and 1 **M8x30** coupling nut in A2-70 stainless steel.
- For outside use.
- Designed for **triangular aluminium systems** with **PSE-C** format continuous profiles.
- Wide range of inclination available: 5°, 10°, 15°, 20°, 25°, 30° y 35°.
- Secure folding position with incorporated fixture.
- Option of vertically mounting solar panels to a height of up to two metres.
- Central upper profile groove compatible with SW13 hexagonal socket.
- Option for triangles in sizes manufactured to order on request.
- Available in anodized.

APPLICATIONS/MOUNTING ACCESSORIES




PSE-C



KFSFCM08

These are used in **triangular aluminium installation systems** as an inclined structural element onto which continuous **PSE-C** profiles can be mounted. Solar panels are finally attached to and supported by these profiles.

To attach **PSE-C** profiles to triangles, two **KFSFCM08** “cross connector for lateral fixing” are used.



TPA-P



ABEI5519


If it is necessary to install braces between adjoining triangles, **TPA-P** “strut profiles for pre-assembled aluminium triangles” should be used. Strut profiles are diagonally attached to profile bars of the two corresponding triangles using **ABEI5519** A2-70 stainless steel self-drilling screws.

BASE MATERIAL/DIRECT MOUNTING

See technical data sheet:

- ST-PTA: Opened triangular aluminium mounting system. Assembled fixing

APPLICATION EXAMPLES

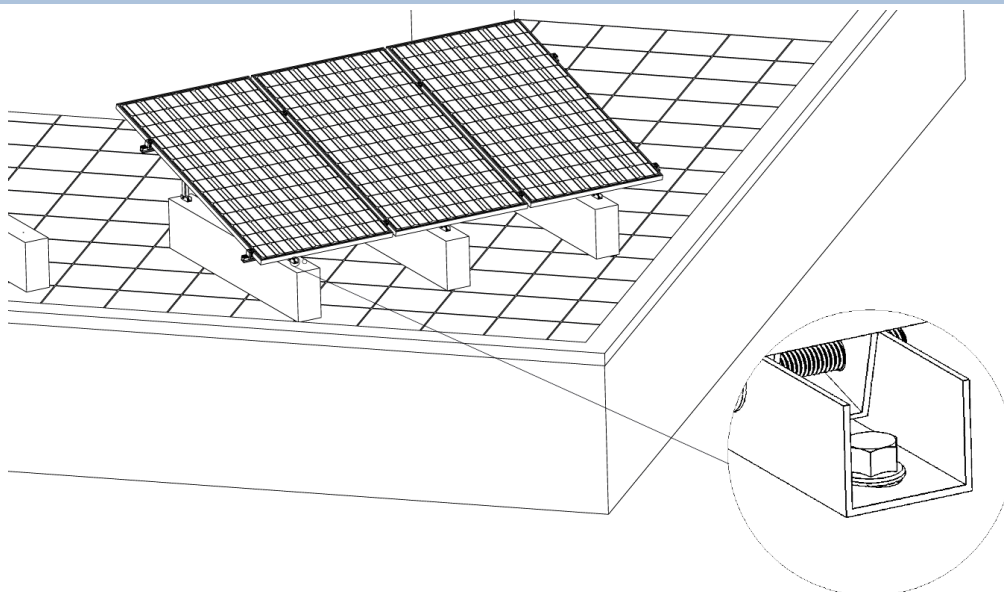

Application example 1: Mounting on concrete roof

1. RANGE

ITEM	CODE	PHOTO	DESCRIPTION	ANGLE	LENGTH	MATERIAL	FINISH
1	TPAA051230		Pre-assembled aluminium opened triangle	5°	1230 mm	EN AW 6063-T6	
						A2-70	Natural anodized 15 microns (AA15)
2	TPAA051750		Pre-assembled aluminium opened triangle	5°	1750 mm	EN AW 6063-T6	
						A2-70	Natural anodized 15 microns (AA15)
3	TPAA101230		Pre-assembled aluminium opened triangle	10°	1230 mm	EN AW 6063-T6	
						A2-70	Natural anodized 15 microns (AA15)
4	TPAA101750		Pre-assembled aluminium opened triangle	10°	1750 mm	EN AW 6063-T6	
						A2-70	Natural anodized 15 microns (AA15)
5	TPAA151230		Pre-assembled aluminium opened triangle	15°	1230 mm	EN AW 6063-T6	
						A2-70	Natural anodized 15 microns (AA15)

6	TPAA151750		Pre-assembled aluminium opened triangle	15°	1750 mm	 EN AW 6063-T6	 Natural anodized 15 microns (AA15)
						 A2-70	
7	TPAA201230		Pre-assembled aluminium opened triangle	20°	1230 mm	 EN AW 6063-T6	 Natural anodized 15 microns (AA15)
						 A2-70	
8	TPAA201750		Pre-assembled aluminium opened triangle	20°	1750 mm	 EN AW 6063-T6	 Natural anodized 15 microns (AA15)
						 A2-70	
9	TPAA251230		Pre-assembled aluminium opened triangle	25°	1230 mm	 EN AW 6063-T6	 Natural anodized 15 microns (AA15)
						 A2-70	
10	TPAA251750		Pre-assembled aluminium opened triangle	25°	1750 mm	 EN AW 6063-T6	 Natural anodized 15 microns (AA15)
						 A2-70	
11	TPAA301230		Pre-assembled aluminium opened triangle	30°	1230 mm	 EN AW 6063-T6	 Natural anodized 15 microns (AA15)
						 A2-70	
12	TPAA301750		Pre-assembled aluminium opened triangle	30°	1750 mm	 EN AW 6063-T6	 Natural anodized 15 microns (AA15)
						 A2-70	
13	TPAA351230		Pre-assembled aluminium opened triangle	35°	1230 mm	 EN AW 6063-T6	 Natural anodized 15 microns (AA15)
						 A2-70	
14	TPAA351750		Pre-assembled aluminium opened triangle	35°	1750 mm	 EN AW 6063-T6	 Natural anodized 15 microns (AA15)
						 A2-70	

2. INSTALLATION INFORMATION

2.1 TPA-A

Pre-assembled aluminium opened triangle



Materials	Finish	Compatible	Assembly accessories
 Al EN AW 6063-T6	 A2 INOX AISI 304 A2-70	 Anodized Natural anodized 15 microns (AA15)	 PSE-C Aluminium profile for assembled fixing.
		 KFSFLC08 Cross connector for lateral fixing.	 ABEIS519 A2 DIN-7504K stainless steel
		 TPA-P Strut profile for TPA-R	

BASE MATERIAL/FIXING


See technical data sheet:

- ST-PTA:** Opened triangular aluminium mounting system. Assembled fixing

Measurement table 1

Code	A (°)	L1 (mm)	L2 (mm)	L3 (mm)	E1 (mm)	E2 (mm)	E3 (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)	L (mm)
TPAA051230	5	1230	174	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1275
TPAA051750	5	1750	174	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1795
TPAA101230	10	1230	324	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1265
TPAA101750	10	1750	324	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1775
TPAA151230	15	1230	470	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1240
TPAA151750	15	1750	470	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1740
TPAA201230	20	1230	613	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1210
TPAA201750	20	1750	613	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1700
TPAA251230	25	1230	752	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1170
TPAA251750	25	1750	752	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1640
TPAA301230	30	1230	884	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1120
TPAA301750	30	1750	884	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1570
TPAA351230	35	1230	1012	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1065
TPAA351750	35	1750	1012	100	1,8	1,8	1,5	30	45	36,6	30	33	40	1490


Drawing

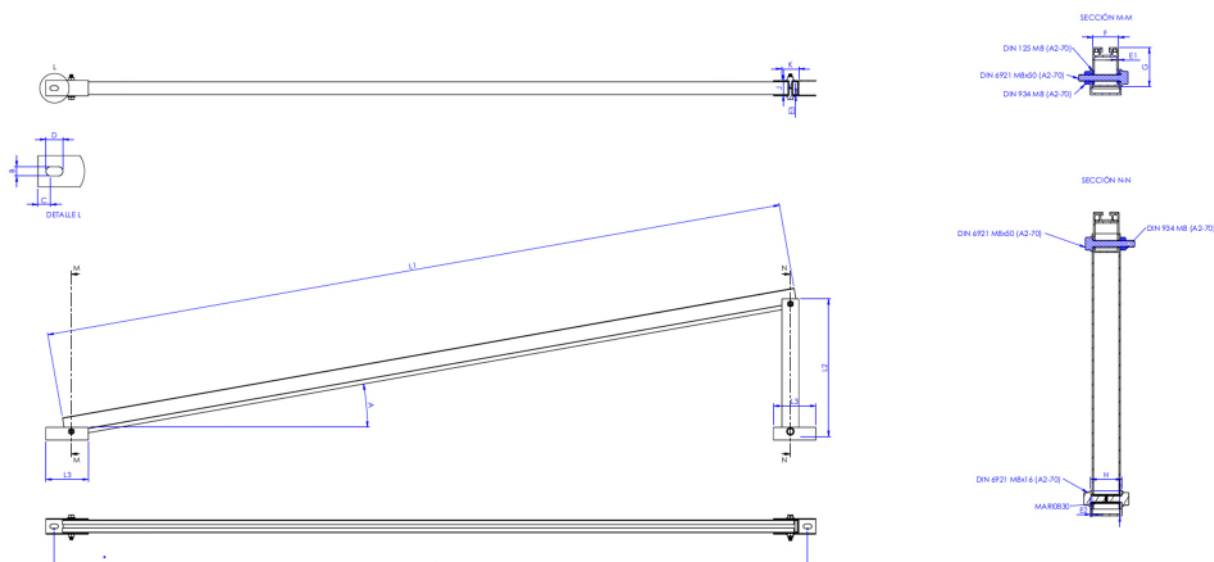

Mechanical properties of the material

	Yield strength $F_{y0.2}$ (N/mm ²)	Ultimate load F_u (N/mm ²)	Elastic modulus E (N/mm ²)	Transverse elastic modulus G (N/mm ²)	Linear expansion coefficient α ($\mu\text{m}/\text{C}^\circ$)	Specific weight ρ (kg/m ³)
A2-70 stainless steel	450	700	210,000	81,000	17.3	7,850
EN AW-6063-T6 aluminium	170	215	69.500	26.100	23,5	2.700

Mechanical properties of the profile.

	Area S (cm ²)	Moment of inertia I_x (cm ⁴)	Moment of inertia I_y (cm ⁴)	Linear weight W (kg/m)
 Upper profile	2,95	3,96	7,00	0,80
 Lowe profile	1,74	1,62	3,87	0,46
 Profile bar	1,65	2,81	3,32	0,45