

CL-SC

PRODUCT DESCRIPTION

- Cable connector clip for photovoltaic modules

CHARACTERISTICS



- Clip for attaching the connector above or below the frame.
- Quick mounting by clipping onto the solar panel frame.
- Carbon steel.
- Finish Atlantis C4 M.
- For outside use.
- For 1 to 3 mm thick support. Can be fitted to the edges of the module or to the structure.
- Fixing to the profile of the module by scratching the frame.
- Quick and intuitive assembly that facilitates assembly and maintenance work, without the need for specific tools for installation.
- Single-use clip, allowing disassembly with specific tools.
- Possibility of reopening for the insertion and removal of the connector.
- Allows the attachment of a connector between $\varnothing 17\text{mm}$ and $\varnothing 22\text{mm}$.

APPLICATIONS / COMPATIBLE WITH



It is used for fixing the connector for photovoltaic modules. It is fixed to the photovoltaic modules by scratching the surface of the frame with two nails in the clipping area.

Allows the attachment of a connector between $\varnothing 17\text{mm}$ and $\varnothing 22\text{mm}$ and has the possibility of reopening for the insertion and removal of the connector.



TOOLS FOR DISASSEMBLY



Flat-head screwdriver

Insert a flat-head screwdriver under the anchor tab to lift the two prongs that scratch the frame and pull the clip all the way out.

APPLICATION EXAMPLE

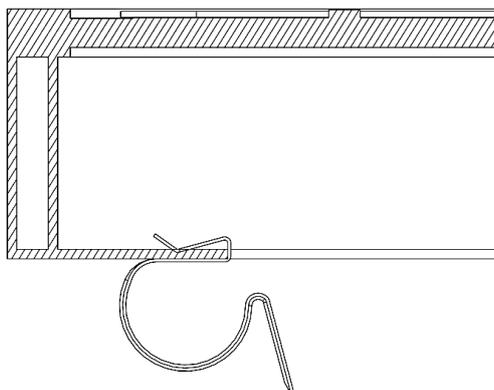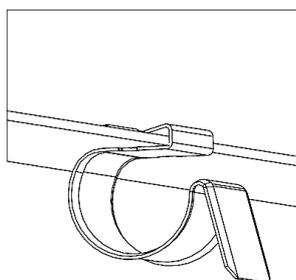

Application example 1: Mounting of the cable connector clip on the photovoltaic modules frame

1. RANGE

ITEM	CODE	PHOTO	DESCRIPTION	FRAME THICKNESS	MATERIAL	FINISH
1	CLSC1722		Cable connector clip for photovoltaic modules	1 a 3 mm	Carbon steel	Atlantis C4 M

2. INSTALLATION INFORMATION

2.1 CL-SC



Cable connector clip

	Material	Finish	Compatible with
	Carbon Steel C675	Atlantis C4 M	Supports between 1 and 3 mm

Measurement table

Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
CLSC1722	19	27.2	16	19.5	0.5

Drawing

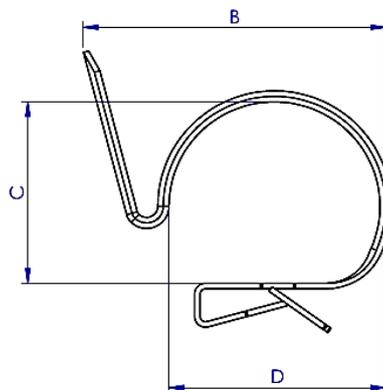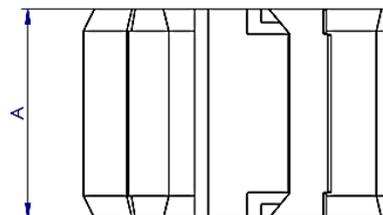

Mechanical properties of the materials

	Yield strength Fy0,2 (N/mm ²)	Ultimate tensile strength Fu (N/mm ²)	Hardness HV
Carbon Steel	480	520	160