

ARS-S



PRODUCT DESCRIPTION

- Washer for double threaded bolt

CHARACTERISTICS

- Watertight washer for double-threaded bolts.
- EPDM washer.
- For outside use.
- Adaptable and resistant elastic body.
- Lower neck for watertight seal of mounting hole.

APPLICATIONS

Used with the solar range to ensure watertightness in sub-structure fixing systems that pass through the roof, such as:

- **KFS-MA:** double-threaded screw for wood. Kit includes an **ARS-S** unit.
- **KFS-RV:** threaded rod for chemical anchor installation. Kit includes an **ARS-S** unit.

Ensures double watertightness on the bottom seal:

- Firstly through the lower lip on the support surface.
- Secondly through the lower neck of the mounting hole.

Lower neck for 15 mm and 16 mm diameter mounting holes, ensuring extra alignment in the fixing system.




KFS-MA




KFS-RV

APPLICATION EXAMPLES

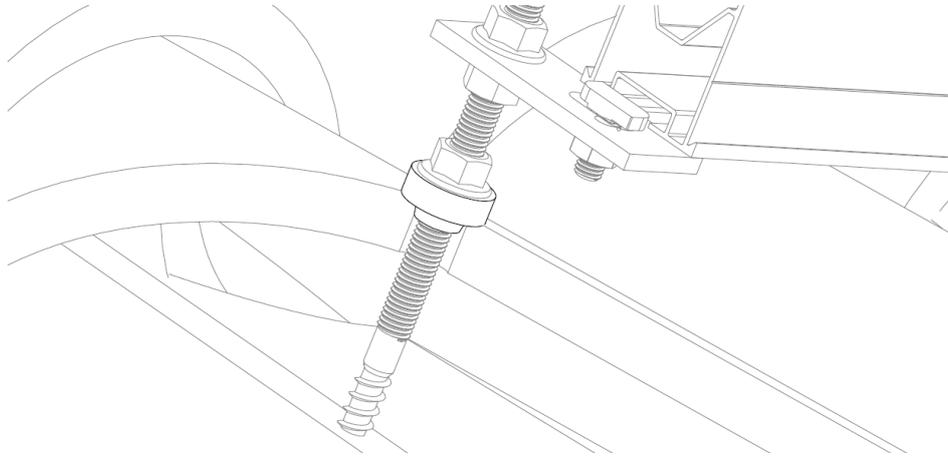

Application example 1: assembly on curved tiles and wood structure.

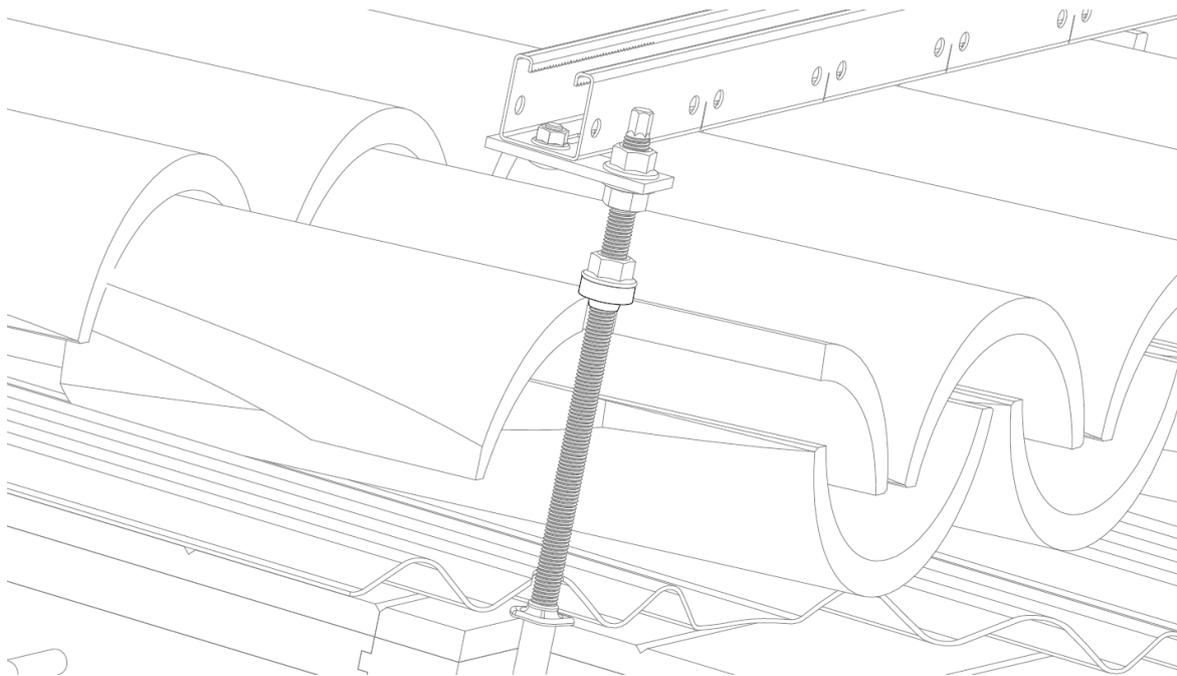

Application example 2: assembly on sandwich panel roof and wood structure.

1. RANGE

ITEM	CODE	PHOTO	DESCRIPTION	SHAFT DIAMETER	INNER DIAMETER	OUTER DIAMETER	MATERIAL
1	ARSS10 ARSS12		Washer for double-threaded bolt	10 mm 12 mm	8 mm 9.5 mm	25 mm 25 mm	 EPDM

2. INSTALLATION INFORMATION

2.1 ARS-S Washer for double-threaded bolt

	Material-1	Compatible	
	 <p>EPDM</p>	 <p>KFS-MA Double-threaded bolt kit for wood</p>	 <p>KFS-RV Threaded rod kit for chemical anchor installation</p>

Measurement table

Code	A (mm)	B (mm)	C (mm)	D (mm)
ARSS10	25	8	8	13
ARSS12	25	9.5	8	13

Drawing

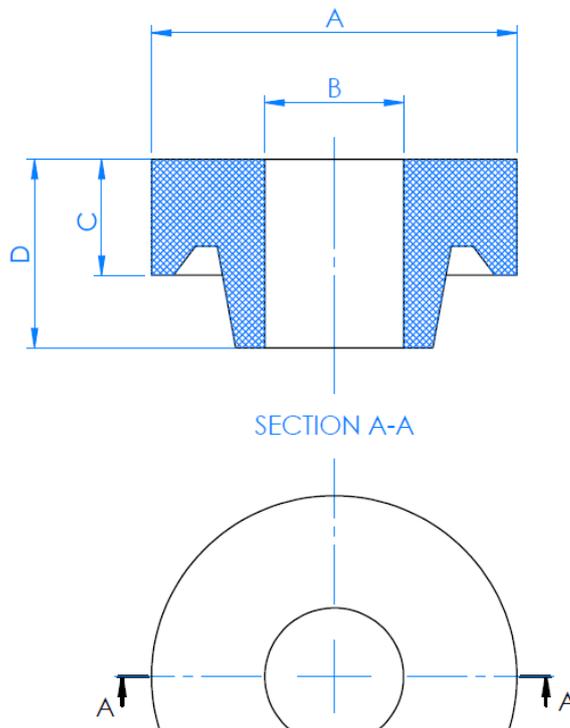


Table showing installation parameters/Pressure of joint on sealed surface

