



CHARACTERISTICS

- Support brackets for fixing bathroom fittings which allow for quick and simple installation.
- Adjustable triangular RA-TRG support with anti-vibration isophonic rubber made of high density polyethylene (HDPE) to avoid all kind of noises.
- Suitable for a variety of materials, solid or hollow: concrete, lightweight concrete, hollow concrete blocks, natural stone, solid brick, hollow brick and wood.
- Zinc plated metallic pieces ensure an attractive fixing throughout the life of the element.
- Nylon and rubber elements possess high resistance to chemical agents and wet conditions.
- Compound assemblies are presented in bags with two pieces with the necessary support bracket installation accessories.

APPLICATIONS

- Support brackets for fixing 1", Ferroli and Roca aluminium radiators to walls.

BASE MATERIALS




APPLICATION EXAMPLES




1. RANGE					
ITEM	PHOTO	CODE	MEAS.	COMPONENT	MATERIAL
1		RA-TRG	1"	Base Support bracket Regulating screw Plug – TN4S Clamping screw	Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J with isophonic rubber Steel Class 4.8 ISO 898-1 zinc plated ISO 4042 A2J Nylon Zinc plated steel ISO 4042 A2J. Hexagonal head + PH2 slot.
2		RA-FRE	1"	Base Support bracket Plate Regulating screw Clamping screw Plug – TN4S Tope	Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J Steel Class 4.8 ISO 898-1 zinc plated ISO 4042 A2J Zinc plated steel ISO 4042 A2J Nylon Plastic
3		RA-FIN	1"	Base Support bracket Plate Regulating screw Clamping screw Plug – TN4S Tope	Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J Steel Class 4.8 ISO 898-1 zinc plated ISO 4042 A2J Zinc plated steel ISO 4042 A2J Nylon Plastic
4		RA-RO	1"	Base Support bracket Plate Clamping screw Plug – TN4S	Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J Nylon
5		RA-TRI	1"	Base Support bracket	Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J
6		RA-FEM	1"	Base Support bracket	Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J
7		RA-RAY	Rayco	Base Support bracket	Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J
8		RA-PES	Pestaña	Base Support bracket	Zinc plated steel ISO 4042 A2J Zinc plated steel ISO 4042 A2J

2. INSTALLATION DATA

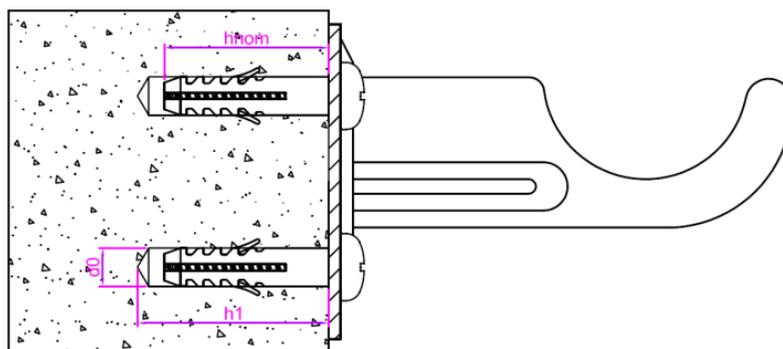


METRIC		d ₀ : Nominal diameter[mm]	h ₁ : Drillhole depth [mm]	h _{nom} : Installation depth [mm]
RA-TRG	ST5x45	8	45	40
RA-FRE	ST5x45	8	45	40
RA-FIN	ST5x45	8	45	40
RA-RO	ST5x45	8	45	40
RA-TRI	-	8	45	40
RA-FEM	-	-	-	50
RA-RAY	-	8	45	40
RA-PES	-	8	45	40

3. PRODUCT INSTALLATION



1. DRILL

Ensure the concrete is compact and without significant porosity.
Suitable for wet, dry or flooded drill holes.
Drill in hammer setting.
Respect specified diameters and depths.




2. CLEAN

Clean holes thoroughly, free from dust or drill debris.
Use a hand air pump and brush



3. INSTALL

Insert plug and thread the screw through the support bracket.
Use a hammer if necessary



If recessed support brackets are required during building work, position the support bracket when cement is fresh and wait for it to set.

